



SWIFT. SILENT. SECURE.

BLADE EVERFLEX™ SPIKE REPLACEMENT INSTRUCTIONS

Installation Tools:

- 7/16" Wrench
- 7/16" Socket
- Ratchet
- Lubricant



DO NOT touch the spike with bare hands.

IMPORTANT! Replace any hardware that is worn or damaged. Always replace nylon lock nuts. To order proper hardware, scan QR Code A.

REMOVAL:

STEP 1 Remove both **Spike Bolts** and all mounting hardware using a **7/16" Socket & Wrench**. **FIG 1**

STEP 2 Pull the defective **Spike** down to Remove it from the **Knuckle**.

INSTALLATION:

STEP 1 Apply a lubricant such as Green Marine ISO 32 Hydraulic Fluid to the top portion of the **Spike** and insert the **Spike** into the **Knuckle**.

STEP 2 Reinstall the mounting hardware and tighten the **Spike Bolts** snug. **FIG 1**



QR Code A
Spike Hardware

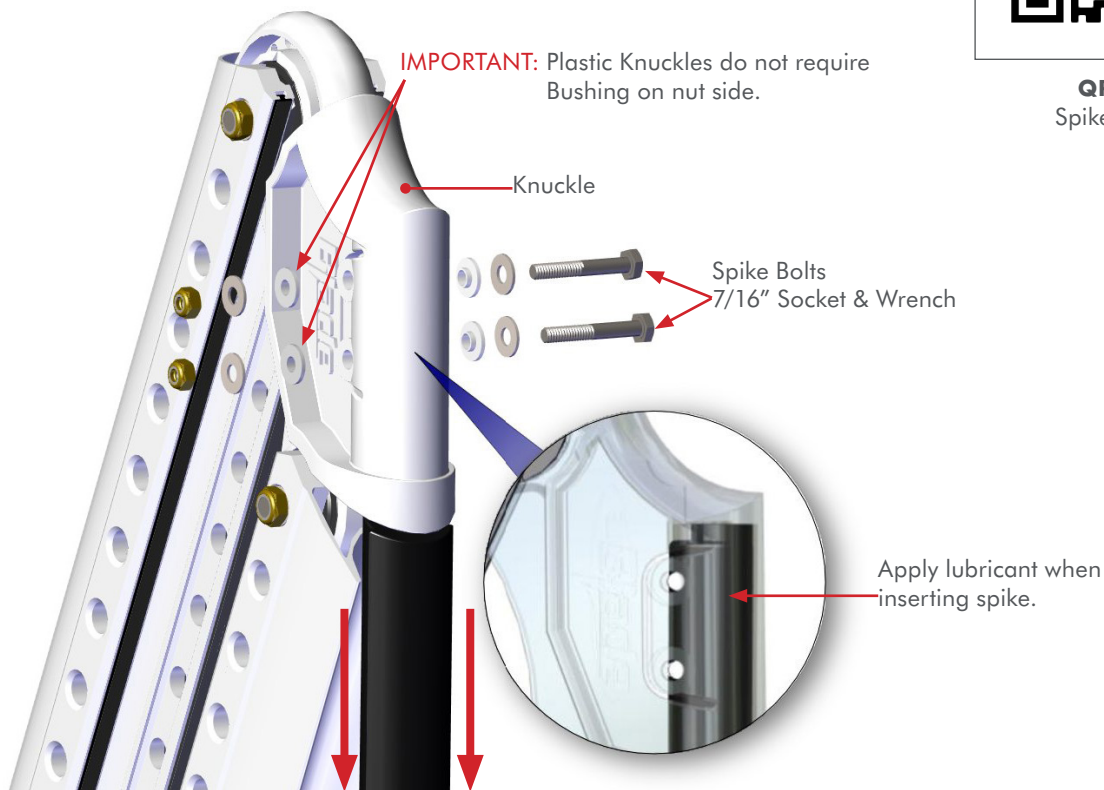


Figure 1

Need help? Contact our Customer Service Team at **1 + 813.689.9932 Option 2**